



**ZASTAVA
KAMIONI**



ZK 101



ZASTAVA KAMIONI

www.zastava-kamioni.co.rs

Zastava kamioni d.o.o. • Trg topolivaca 4 • 34000 Kragujevac, Srbija



tel: 034 336 160 • 034 301 145 fax 034 335 319

www.zastava-kamioni.co.rs • office@zastava-kamioni.co.rs



ZK 101

ENGINE TYPE	EURO 3	SOFIM 8140.43S, Diesel, four strokes with direct fuel injection, (COMMON RAIL)
DISPLACEMENT (cm ³)		2800
MAXIMUM POWER AT 3600 RPM		92 kW / 125 KS
MAXIMUM TORQUE AT 1800 RPM		290Nm
COOLING TYPE		Water
CLUTCH		Dry with a single disc and 10 1/2" mechanical control
GEARBOX		IVECO 2826.5 mechanical with 5 synchronized gears for forward movement and reverse
BRAKE		Hydraulic servo with ABS (model 45.12), and independent circulation, disk in front, drums in the rear
STEERING WHEEL		Hydraulic with servo action

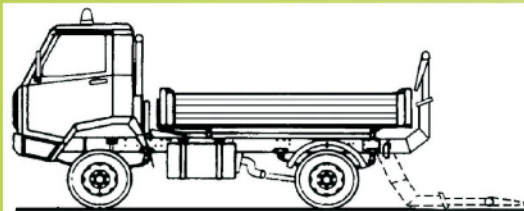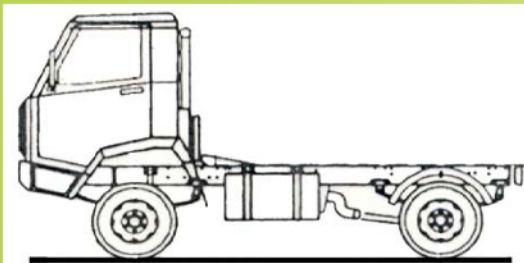

TEHNICAL DATA	CHASSIS CAB 4 x 2		TRUCK KIPER 4 x 2		CHASSIS CAB 4 x 4		TRUCK KIPER 4 x 4		
	MODELS	35.10S	35.10G	35.10S	35.10G	35.10G	45.10G	35.10G	45.10G
WHEEL BASE (mm)		2300 2650		2300 2650		2300 2650		2300 2650	
VEHICLE LENGTH (mm)		4040 4390		4280 4810		4040 4390		4040 4390	
VEHICLE WIDTH (mm)		1750		1760		1750		1760	
VEHICLE HEIGHT (mm)		2190		2190		2190		2190	
INTERIOR LOADING BED / AREA LENGTH (mm)				2480 3040				2480 3040	
INTERIOR LOADING BED / AREA WIDTH (mm)				1700				1700	
INTERIOR LOADING BED / AREA HEIGHT (mm)				400				400	
SURMOUNTING MAXIMUM RISE (%)		36		36		76		76	
CLEARANCE (VEHICLE FLOOR GROUND) (mm)		1050		1050		1050		1050	
PAYLOAD (kg)		1700 1670	1650 1620	1250 1170	1200 1120	1550 1520	2250 2230	1100 1020	1800 1730
GVW (kg)		3500		3500		3500	4200	3500	4200
TYRES		215/75 R16	185/75 R16	215/75 R16	185/75 R16	185/75 R16		185/75 R16	
MAXIMUM SPEED (km/h)		100		100		100	100	100	100
FUEL TANK CAPACITY (l)		70		70		70		70	

ACCORDING TO PROGRESS POLICY OF PRODUCTS ZASTAVA KAMIONI CAN CHANGE TEHNICAL CHARACTERISTICS OF PRODUCTS WITHOUT PREVIOUS ANNOUNCEMENT